

2/8

NOTE 1: NC = NOT
CONNECTED

NOTE 2:

RESERVED =

THE PIN MAY BE USED TO
SUPPORT THE SIGNAL
REQUIRED FOR A TYPE OF
ANY INTERFACE UNIT. IT
CANNOT BE USED FOR
CURRENT OR FUTURE
IMPLEMENTATIONS OF
THIS SPECIFICATION.


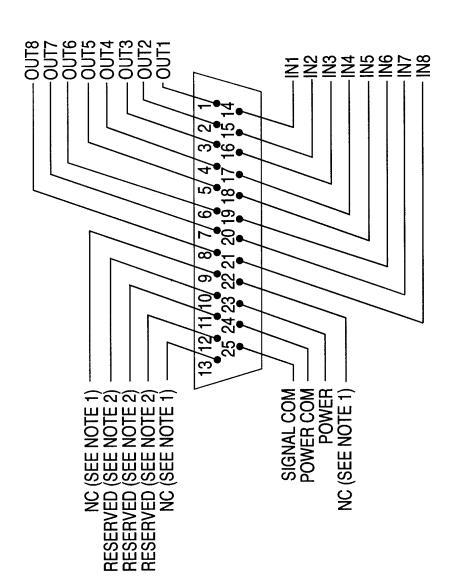


FIG. 2

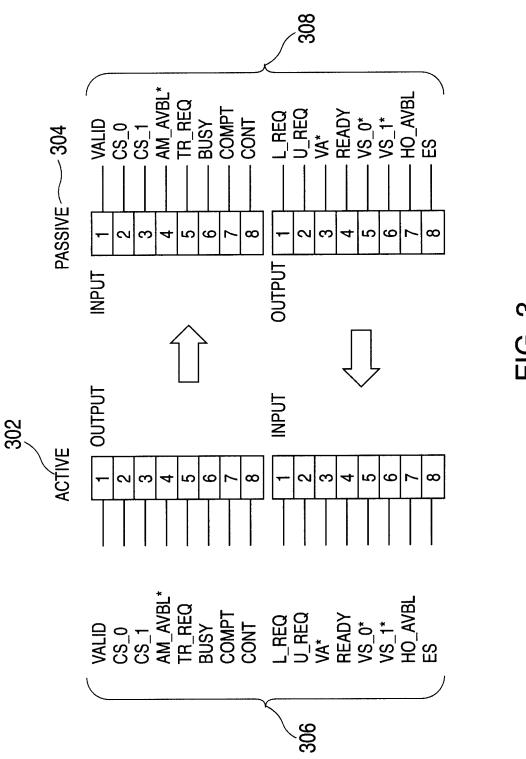

-16.3

4/8

PASSIVE TIMERS (TOOL)

TP4 = 60 SEC

TP5 = 5 SEC

TP3 = 60 SEC

TP2 = 5 SEC

TP1 = 5 SEC

SIGNAL TIME DIAGRAM FOR SINGLE HANDOFF (LOAD)

**ACTIVE TIMERS** 

(OHT)

TA1 = 10 SEC

TA2 = 5 SEC

TA3 = 5 SEC

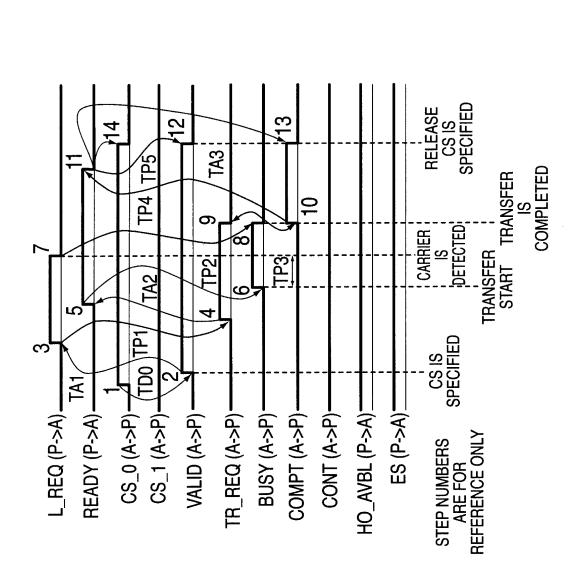
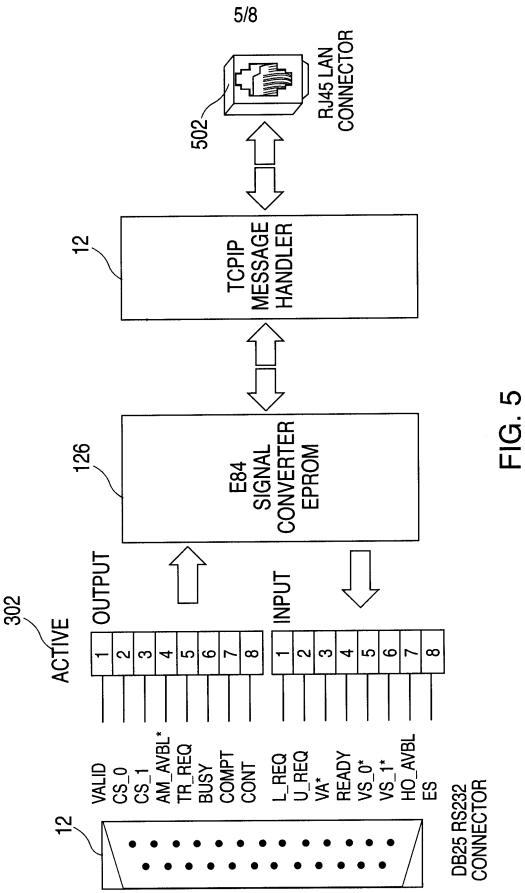


FIG. 4



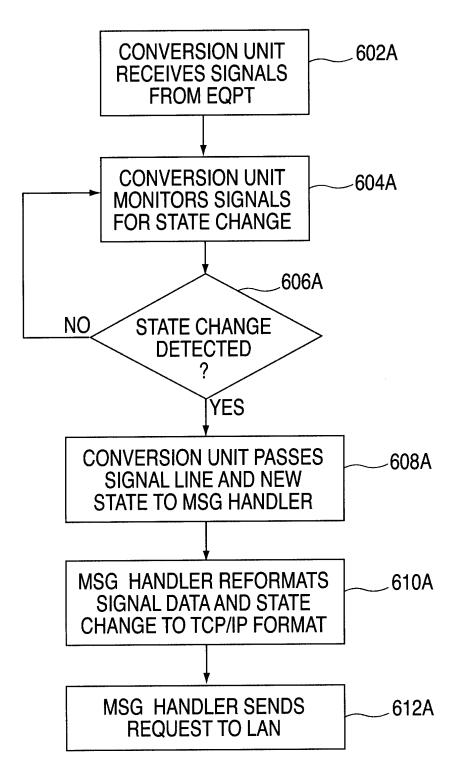


FIG. 6A

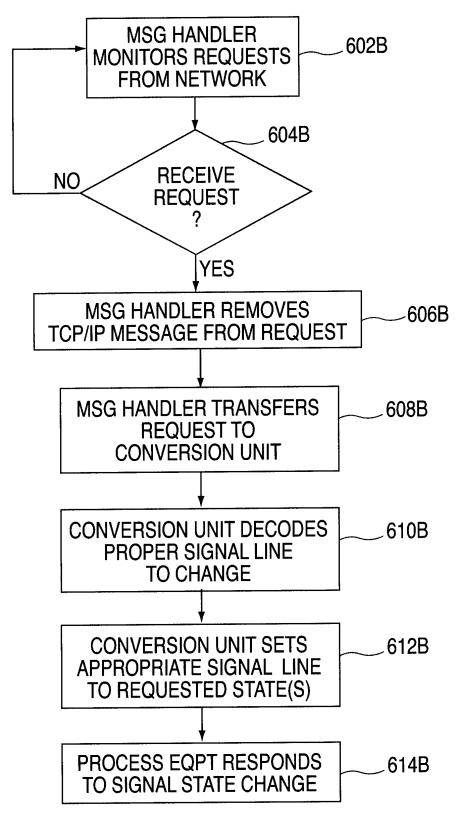


FIG. 6B

